

E60H Series

Diameter ϕ 60mm Hollow shaft type Incremental Rotary encoder

■ Features

- External diameter ϕ 60mm, inner diameter of shaft ϕ 20mm
- Easy installation at narrow space
- Suitable for measuring Angle, Position, Revolution, Speed, Acceleration and distance
- Power supply : 5VDC, 12–24VDC \pm 5%
- Various output types

⚠ Please read "Caution for your safety" in operation manual before using.



■ Ordering information

E60H	20	–	8192	–	3	–	N	–	24	–	
Series	Shaft diameter	Pulse/1 Revolution	Output phase	Output		Power supply		Cable			
Diameter ø 60mm, hollow shaft type	ø 20mm	1024, 5000, 8192	3 : A, B, Z 6 : A, \bar{A} , B, \bar{B} , Z, \bar{Z}	T : Totem pole output N : NPN open collector output V : Voltage output L : Line driver output(※)		5 : 5VDC ±5% 24 : 12–24VDC ±5%		No mark:Normal type (※) C:Cable outgoing connector type			

※ Standard : E60H20–[PULSE]–3–N–24

※ The power of Line driver is only for 5VDC

※ Cable length : 250mm

■ Specifications


Item		Diameter ϕ 60mm hollow shaft type of Incremental rotary encoder	
Resolution(P/R)		1024, 5000, 8192	
Electrical specification	Output phase	A, B, Z phase (Line driver output A, \bar{A} , B, \bar{B} , Z, \bar{Z} phase)	
	Phase difference of output	Phase difference between A and B : $\frac{T}{4} \pm \frac{T}{8}$ (T=1cycle of A phase)	
	Control output	Totem pole output	<ul style="list-style-type: none"> • Low \Rightarrow Load current: Max. 30mA, Residual voltage : Max. 0.4VDC • High \Rightarrow Load current: Max. 10mA, Output voltage (Power supply 5VDC): Min. (Power supply–2.0) VDC, Output voltage (Power supply 12–24VDC): Min. (Power supply–3.0) VDC
		NPN open collector output	Load current : Max. 30mA, Residual voltage : Max. 0.4VDC
		Voltage output	Load current : Max. 10mA, Residual voltage : Max. 0.4VDC
		Line driver output	<ul style="list-style-type: none"> • Low \Rightarrow Load current : Max. 20mA, Residual : Max. 0.5VDC • High \Rightarrow Load current : Max. –20mA, Output voltage : Min. 2.5VDC
	Response time (Rise/Fall)	Totem pole output	Max. 1 μ s
		NPN open collector output	Max. 1 μ s
		Voltage output	Max. 1 μ s
		Line driver output	Max. 0.5 μ s
	Max. Response frequency	300kHz	
	Power supply	<ul style="list-style-type: none"> • 5VDC \pm5% (Ripple P–P: Max. 5%) • 12–24VDC \pm5% (Ripple P–P: Max. 5%) 	
	Current consumption	Max. 80mA (disconnection of the load), Line driver output: Max. 50mA (disconnection of the load)	
	Insulation resistance	Min. 100M Ω (at 500VDC mega between all terminals and case)	
	Dielectric strength	750VAC 50/60Hz for 1 minute (Between all terminals and case)	
	Connection	Cable outgoing type, 200mm cable outgoing connector type	
Mechanical specification	Starting torque	Max. 150gf \cdot cm (0.015N \cdot m)	
	Rotor inertia	Max. 110g \cdot cm ² (11 \times 10 ^{–5} kg \cdot m ²)	
	Shaft loading	Radial : 5kgf, Thrust : 2.5kgf	
	Max. allowable revolution	(Note1)	6000rpm
Vibration		1.5mm amplitude at frequency of 10 ~ 55Hz in each of X, Y, Z directions for 2 hours	
Shock		Max. 100G	
Ambient temperature		–10 ~ 70 $^{\circ}$ C (at non-freezing status), Storage : –25 ~ 85 $^{\circ}$ C	
Ambient humidity		35–85%RH, Storage : 35–90%RH	
Protection		IP50 (IEC standard)	
Cable		ϕ 5mm, 5P, Length : 2m, Shield cable (Line driver output : ϕ 5mm, 8P)	
Accessory		Bracket	
Unit weight		Approx. 300g	

※ (Note1) Not indicated type is customizable.

※ (Note2) Max. allowable revolution \geq Max. response revolution 【Max. response revolution (rpm) = $\frac{\text{Max. response frequency}}{\text{Resolution}} \times 60 \text{ sec}$ 】

Incremental ϕ 60mm Hollow Shaft Type

Control output diagram

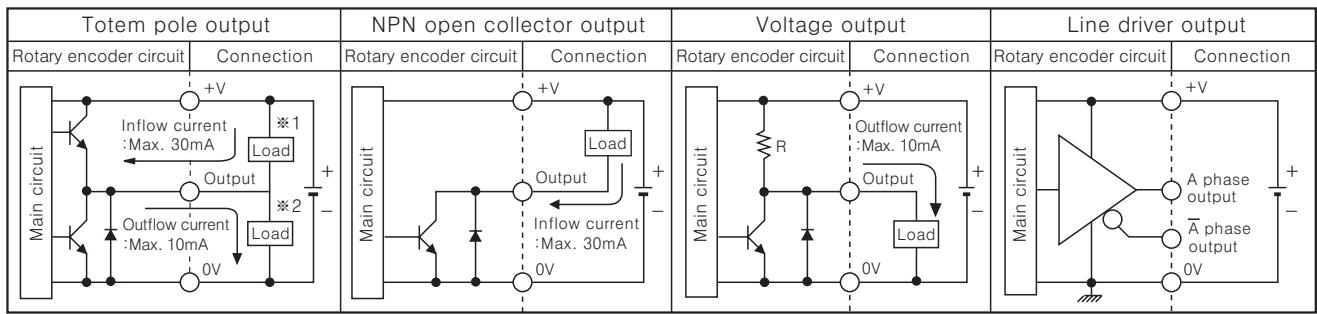


※ Totem pole output type can be used for NPN open collector output type(※1) or Voltage output type(※2).


※ All output circuits of A, B, Z phase is same. (Line driver output is A, \bar{A} , B, \bar{B} , Z, \bar{Z})

Output waveform

- Totem pole output / NPN open collector output / Voltage output

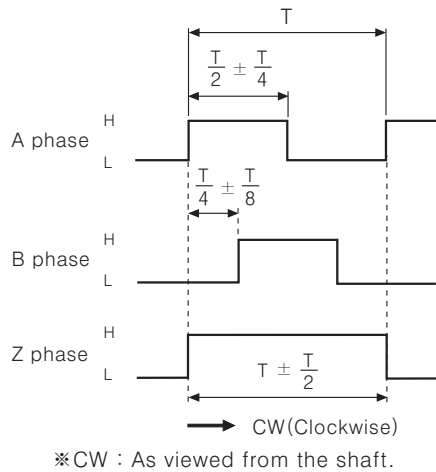


- Line driver output

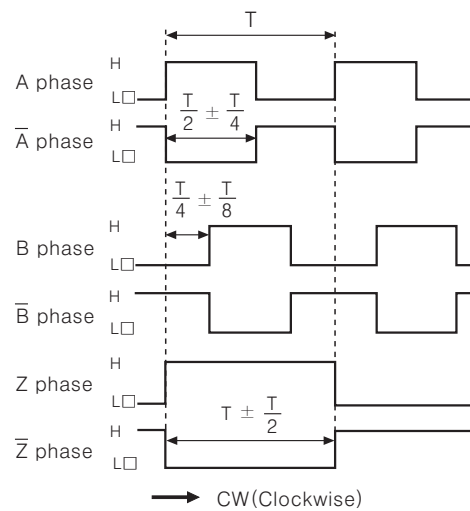

Connections

Normal type


- Totem pole output / NPN open collector output / Voltage output

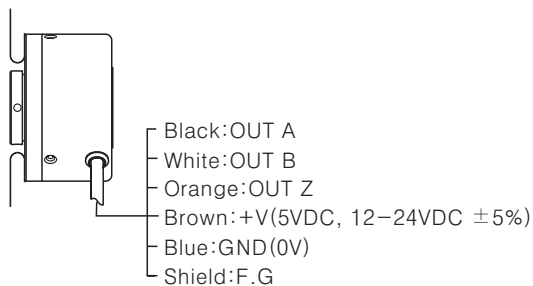

※ Unused wires must be insulated.



※ The metal case and shield cable of encoder should be grounded(F.G).

- Line driver output

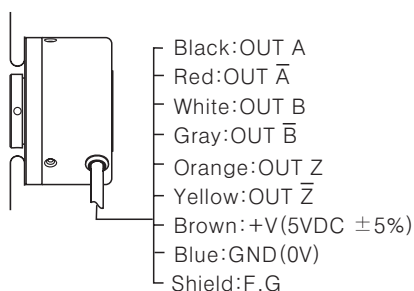

Cable outgoing connector type

- Totem pole output / NPN open collector output / Voltage output
- Line driver output



Totem pole output NPN open collector output Voltage output			Line driver output		
Pin No	Function	Cable color	Pin No	Function	Cable color
①	OUT A	Black	①	OUT A	Black
②	OUT B	White	②	OUT \bar{A}	Red
③	OUT Z	Orange	③	+V	Brown
④	+V	Brown	④	GND	Blue
⑤	GND	Blue	⑤	OUT B	White
⑥	F.G	Shield	⑥	OUT \bar{B}	Gray
			⑦	OUT Z	Orange
			⑧	OUT \bar{Z}	Yellow
			⑨	F.G	Shield

※ F.G(Field Ground): It should be grounded separately.

(A)
Counter

(B)
Timer

(C)
Temp.
controller

(D)
Power
controller

(E)
Panel
meter

(F)
Tacho/
Speed/
Pulse
meter

(G)
Display
unit

(H)
Sensor
controller

(I)
Switching
power
supply

(J)
Proximity
sensor

(K)
Photo
electric
sensor

(L)
Pressure
sensor

(M)
Rotary
encoder

(N)
Stepping
motor &
Driver &
Controller

(O)
Graphic
panel

(P)
Field
network
device


(Q)
Production
stoppage
models &
replacement

E60H Series


Dimension

(Unit:mm)


Normal type

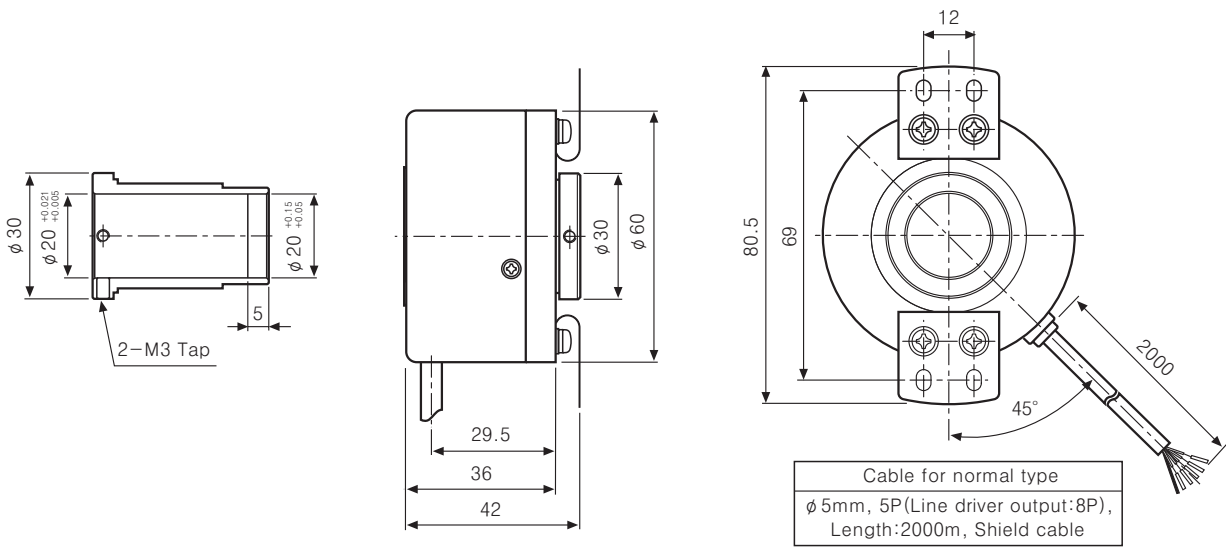

Cable outgoing connector type

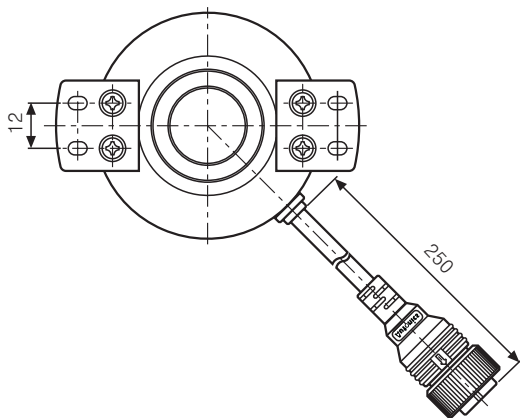

Bracket

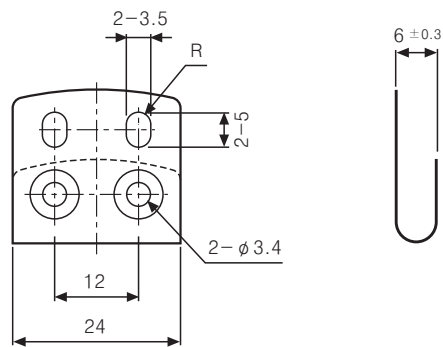

※Connector cable is customizable and see M-57 for specifications.