




SL Series Ø86mm Multi-Stamp Type Rotating Signal Light

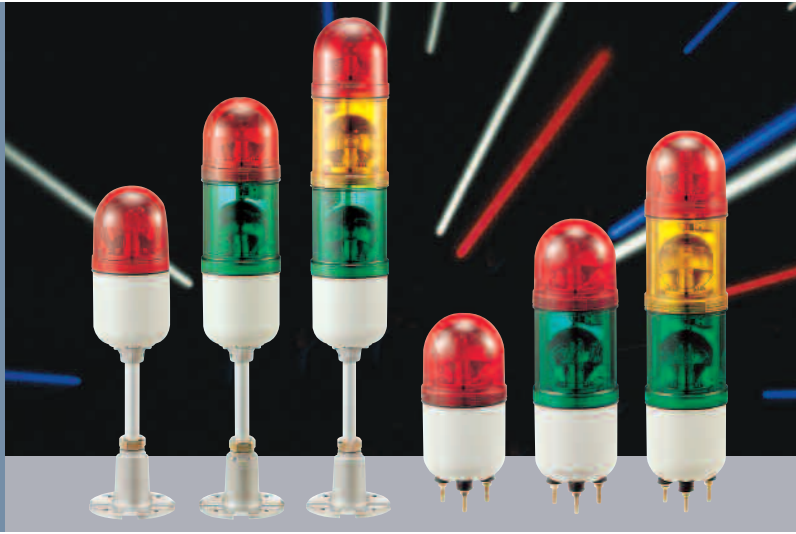

Ordering information (표준주문사양)

	<u>SL</u>	<u>G</u>	<u>F-2</u>	<u>10</u>	<u>-</u>	<u>RG</u>
	①	②	③	④	⑤	⑥
①	SL	Dome top lens series				
	G	Stud mount				
②	P	Pole mount				
③		Rotating mirror				
	F	Flickering light				
	K	1 stack	110V AC, 220V AC			
		2stack	110V AC, 220V AC			
④	1	1 Stack				
	2	2 Stack				
	3	3 Stack				
⑤	01	12V DC				
	02	24V DC				
	10	110V AC				
	20	220V AC				
	FF	110/220V AC				
⑥	R	Red lens				
	G	Green lens				
	Y	Yellow lens				
	B	Blue lens				

Features (특징)

- Ø86mm lens diameter
- Rotating, Flickering model
- Stud mounting
- 3 lens colors available
- Various operating voltage
- Incandescent or Xenon bulb


- Ø86mm 투광렌즈 적용
- 반사회전타입, 점구점멸타입
- 편리한 취부고정구
- 3가지 색상의 투광렌즈
- 다양한 전압사양
- 2가지 전압을 동시에 사용(110, 220V)
- 각 stack 마다 AC 전압 분리 가능
- 장시간 수명의 전구

Specification (전기적사항)

Series	SL		
Model	SLG / SLP	SLGF / SLPF	SLGK / SLPK
Power supply	12V DC, 24V DC, 110/220V AC	12V DC, 24V DC, 110/220V AC	110V AC, 220V AC
Lens type	Smooth type	Prism type	Smooth type
Lens color	Red, Green, Yellow		
Rotation rate	130 / min		130 / min
Flash rate		80 / min	
Internal buzzer	Not available		
Current consumption	1 Stack	12V DC:0.4A / 24V DC:0.3A / 110/220V AC:0.07A	110V AC:0.07A / 220V AC:0.07A
	2 Stack	12V DC:0.8A / 24V DC:0.6A / 110/220V AC:0.14A	110V AC:0.14A / 220V AC:0.14A
	3 Stack	12V DC:1.2A / 24V DC:0.9A / 110/220V AC:0.2A	
Bulb type	Incandescent (전구형)		
Bulb voltage and wattage	12V, 24V, 110V, 220V : 8W		110V/ 220V AC:12V5W
	110V/ 220V : 12V 5W		
Termination	Wire leads		
Stack	1 Stack~3 Stack		1 Stack, 2 Stack

Dimensions (외형치수도)

(UNIT: mm)

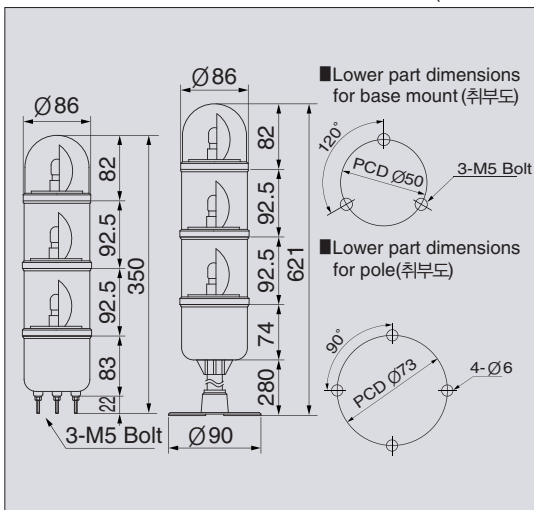

Connections (결선도)

